Samsung ME75C Commercial LED Displays

Huge is the only impact it knows how to make.

Ultra-Slim 75" Commercial LED Display with Superior Energy Efficiency

Size matters. It's a universal truth in digital signage. And the biggest benefit of the Samsung ME75C. At an attention-grabbing 75", the large display is a reliable, cost-effective way to convey a more impactful message in retail environments, conference rooms, public spaces, educational venues and more. The edge-lit LED is bright and captivating, yet it consumes less power for lower operating costs. The built-in WiFi and WiDi enable seamless connectivity. The integrated open SMART Signage Platform streamlines digital signage deployment. And the tiling of multiple displays allows you to create a videowall nothing short of spectacular. The Samsung ME75C.

Edge-Lit LED Backlight
The edge-lit 75" display features 1920 x 1080 Full HD resolution with 550 nit brightness and 5000:1 contrast ratio for sharp, detail-rich images and crisp, easily legible type.

Ultra-Slim 1.9" Chassis
The stylishly thin chassis helps simplify installation while meeting ADA compliance regulations.

Lower TCO
LED technology consumes an average of 40% less power, for lower total cost of ownership.

Integrated HDTV Tuner
The built-in TV tuner provides the option of easily displaying broadcast TV.

Embedded WiFi and WiDi
The built-in WiFi of the ME75C delivers seamless Internet connectivity, and the integrated WiDi (Wireless Display) technology allows you to wirelessly show HD video from enabled PCs.

Optional Touch Overlay
Add an optional IR touch overlay accessory to enable up to 6 simultaneous touch points.

SMART Signage Platform Compliant
This integrated, open platform provides a powerful streamlined solution that reduces TCO for digital signage deployments, providing savings in hardware, installation and operating costs.

Samsung ME75C Commercial LED Displays

KEY SPECIFICATIONS

For complete product specifications, visit samsung.com/prodisplay

Display	**Model Number**	**ME75C**
	Screen Size	75"
	Panel Technology	240Hz (Edge-LED Backlight)
	Resolution	1920 x 1080
	Brightness (cd/m²)	550 nits
	Contrast Ratio (Typical)	5000:1
	Viewing Angle	178°/178°
	Orientation	Landscape/Portrait
	Response Time	8ms
Connectivity	Input	VGA (D-Sub), DVI-D, DisplayPort 1.2, Component (CVBS Common), HDMI (2), Stereo Mini-Jack
	Output	DisplayPort 1.2 (Loop-out), Stereo Mini-Jack
	External Control	RJ45, RS232C (In/Out)
	External Sensor	IR/Ambient Light
Power	Power Supply	AC 100 - 240 V~ (+/- 10%), 50/60 Hz
	Power Consumption (Typical/Max)	290W / 319W
	Power Consumption (Standby)	<0.5W
Environmental Conditions	Operating Temperature	0º C - 40º C
	Operating Humidity	10 - 80%
Features	Special	Built-in Speaker (10W+10W), WiFi Embedded (802.11 a/b/g/n support), WiDi 2.0, Magic Clone (to USB), Auto Source Switching & Recovery, Lamp Error Detection, Super Clear Coating, Temperature Sensor, RS232C/RJ45 MDC, Plug and Play (DDC2B), PIP/PBP, Video Wall (10x10), Image Rotation, Button Lock, DisplayPort 1.2 Digital Daisy Chain (Supporting 2x2 UHD Resolution, HDCP Support), Smart Scheduling, Smart F/W update, Built In MagicInfo (Lite, Premium-S, Videowall-S)
	SMART Signage Platform Compliant	Yes
	Tuner	Yes
	Internal Media Player	Cortex-A9 1Ghz Dual Core, 1GB DDR3, 4GB FDM, USB (2)
	VESA Standard Wall Mount Interface	400 x 400mm
Dimensions	Product Dimensions (without stand)	66.1" x 37.7" x 1.9"
	Packaging Dimensions	73.3" x 46.2" x 18.6"
	Bezel Width	17.2mm (Bottom 20.8mm)
Weight	Product Weight	100.1 lbs.
	Shipping Weight	144.3 lbs.
Service	Standard Warranty	3 Years On-Site (Parts/Labor)
Accessories	Included	Quick Setup Guide, Warranty Card, Application CD, D-Sub Cable, Power Cord, Remote Controller, Batteries
	Optional Stand	STN-L75D
	Optional Mount	WMN4277S (Landscape Only), WMN4675MD (Videowall)
	Optional Media Player	SBB-C, SBB-CD7, SBB-CQ7, PIM-BD7, PIM-BQ7P
	Optional Touch Overlay	CY-TM75
Green Management	Emission Standard	EMC
	ENERGY STAR® 5.0 Compliant	N/A
	RoHS Compliant	Yes
	Packaging Recyclability	Packing Materials Recyclable

CONNECTIVITY

1. RS232C In
2. RS232C Out
3. IR/Ambient Sensor In
4. Audio Out
5. Audio In
6. USB 2.0
7. HDMI
8. DisplayPort In
9. DVI IN
10. DisplayPort Out
11. Antenna In
12. VGA In
13. Component AV In
14. IR Out
15. RJ45 In

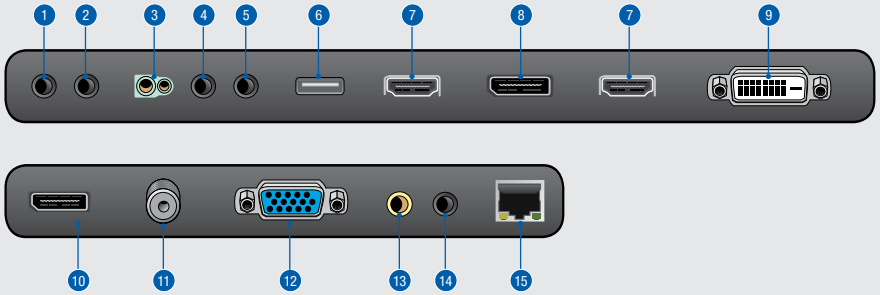

For complete product information and accessories, visit samsung.com/business or samsung.com/prodisplay

Follow us: @SamsungBizUSA | YouTube youtube.com/samsungbizusa

Samsung Electronics has been named 2013 ENERGY STAR Partner of the Year in the product manufacturing category by the U.S. Environmental Protection Agency (EPA).

Product Support: 1-800-SAMSUNG
1-866-SAM4BIZ

©2013 Samsung Electronics America, Inc. Samsung is a registered mark of Samsung Electronics Corp., Ltd. Specifications and designs are subject to change without notice. Non-metric weights and measurements are approximate. All other brand, product, service names and logos are trademarks and/or registered trademarks of their respective manufacturers and companies. Simulated screen images. See samsung.com for detailed information. Printed in USA. LFD-ME75CB2BDSHT-OCT13T

ENERGY STAR AWARD 2013
PARTNER OF THE YEAR